

**LUMSDEN CORPORATION**

# Traxx-Rite Sprockets

P.O. BOX 4647, LANCASTER, PA 17604 -10 ABRASO STREET, LANCASTER, PA 17601

(717)394-6871 - FAX (717)394-1640

WWW.LUMSDENCORP.COM 800-367-3664


The Wiremation division of Lumsden Corporation is proud to unveil a NEW product. Introducing Traxx-Rite stainless steel sprockets for use with woven wire conveyor belting. The chart below lists the various different belt specifications in which the NEW Traxx-Rite sprockets are available.

Traxx-Rite sprockets are ideal for positive drive conveying systems in food processing, baking and canning. All sprockets are manufactured in 303 stainless steel, and come complete with a standard keyway and holes for set screws.


| Belt Specification          | Diameter * | Bore Sizes Available | Approximate Opening            | Open Area %  | Minimum Nose Bar Diameter |
|-----------------------------|------------|----------------------|--------------------------------|--------------|---------------------------|
| TR18-16-14<br>TR18-16-16    | 3.00"      | 1.00" - 1.75"        | .587" x .670"<br>.604" x .687" | 78.6<br>82.9 | 1.432"<br>1.432"          |
| TR30-24-17                  | 4.00"      | 1.00" - 1.75"        | .346" x .446"                  | 77.2         | .955"                     |
| TR30-31-16                  | 1.55"      | .75"                 | .337" x .324"                  | 70.5         | .739"                     |
| TR42-36-17<br>TR42-36-18    | 2.27"      | .75" - 1.50"         | .232" x .279"<br>.239" x .286" | 68.0<br>71.8 | .636"<br>.636"            |
| TR48-52-17<br>TR48-52-18    | 3.00"      | 1.00" - 1.75"        | .196" x .177"<br>.203" x .184" | 60.1<br>64.7 | .441"<br>.441"            |
| TR60-48-18<br>TR60-48-18/20 | 2.00"      | .75" - 1.25"         | .153" x .203"<br>.165" x .203" | 62.1<br>67.0 | .477"<br>.477"            |
| TR72-68-18                  | 2.80"      | .75" - 1.75"         | .120" x .129"                  | 52.7         | .337"                     |

\* Contact sales department for other diameter sizes.

**Sprocket Teeth**

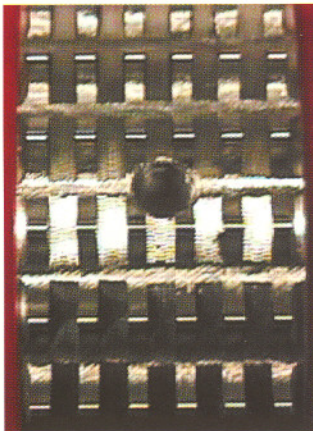

**Traxx-Rite Belting**

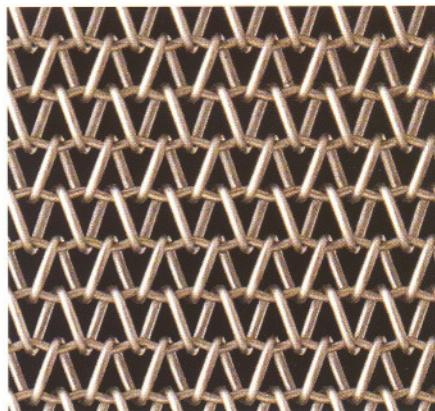

**Sprocket Side View**

